

# TAYSON<sup>®</sup> VALVES



## VÁLVULA RETENCIÓN Pie (Foot Check Valve)

### Lista de Materiales

Cuerpo	Hierro Fundido	
Sello	EPDM	
Resorte	Acero Inoxidable	SS304
Canastillo	Acero Zincado	

### Dimensiones

DN	50	65	80	100	125	150	200	250
A	100	120	140	170	200	230	300	370
C	165	185	200	220	250	285	340	405
D	111	131	148	168	198	222	278	329
E	156	176	202	212	242	276	332	385
L	80	100	120	150	175	200	250	300


### Características

Presión Nominal	16 Bar a 20 °C
Temperatura Trabajo	-20 °C a 135 °C
Cobertura	Pintura Epoxy
Norma	DIN

### Certificados



ISO 9001:2000

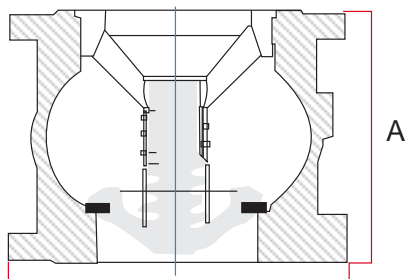


C  
E



L

D

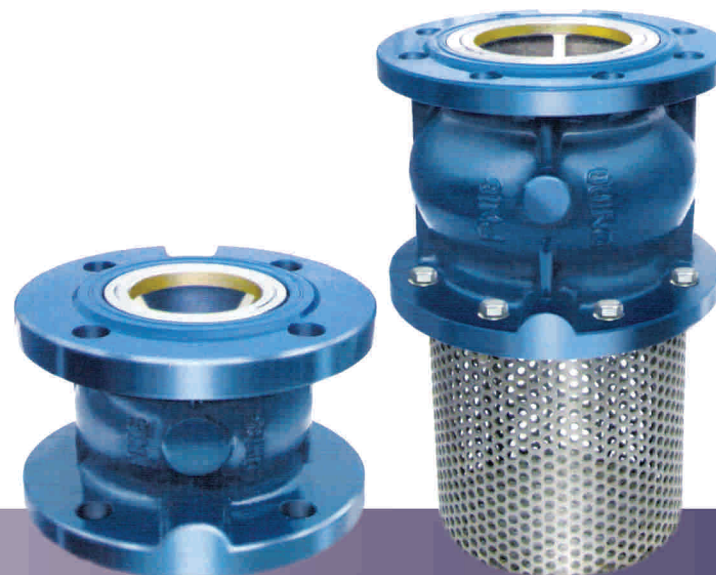

**cosmoplas<sup>®</sup>**

Casa Matriz: Vicuña Mackenna 601, Fono: 6352660, Fax: 6352662  
 Sucursal Riegoaland: Tabancura 1468, Fono: 2178038, Fono-Fax: 2178039  
 Sucursal Temuco: General Mackenna 1027, Fono: 45-214459, Fax: 45-234704  
 Sucursal Puerto Montt: Panamericana Sur Km 1025, Bodega 15-16 Fono-Fax: 65-481748  
[www.cosmoplas.cl](http://www.cosmoplas.cl)

Distribuidor: